

EARTH MOVING

PHIBER



PhiBer.ca | 1.866.264.8030 | info@phiber.ca

INNOVATIVE DESIGN
PARTNERS IN EFFICIENCY

GLADIATOR

DESIGN

The Gladiator's design provides added strength and durability. It boasts the deepest box section in the industry, protecting your investment.

CAPACITY


The Gladiator can move more dirt than competitive units. Thanks to it's uniquely shaped moldboard, it can move 10% more volume than most competitive blades of comparable size.

LARGE GRIP TIRES

The Gladiator comes standard with large grip tires to prevent sideways skidding while digging ditches.


LARGE INDICATORS

Industry-leading indicators allow the user to accurately track and control tilt, depth, horizon, and pitch.

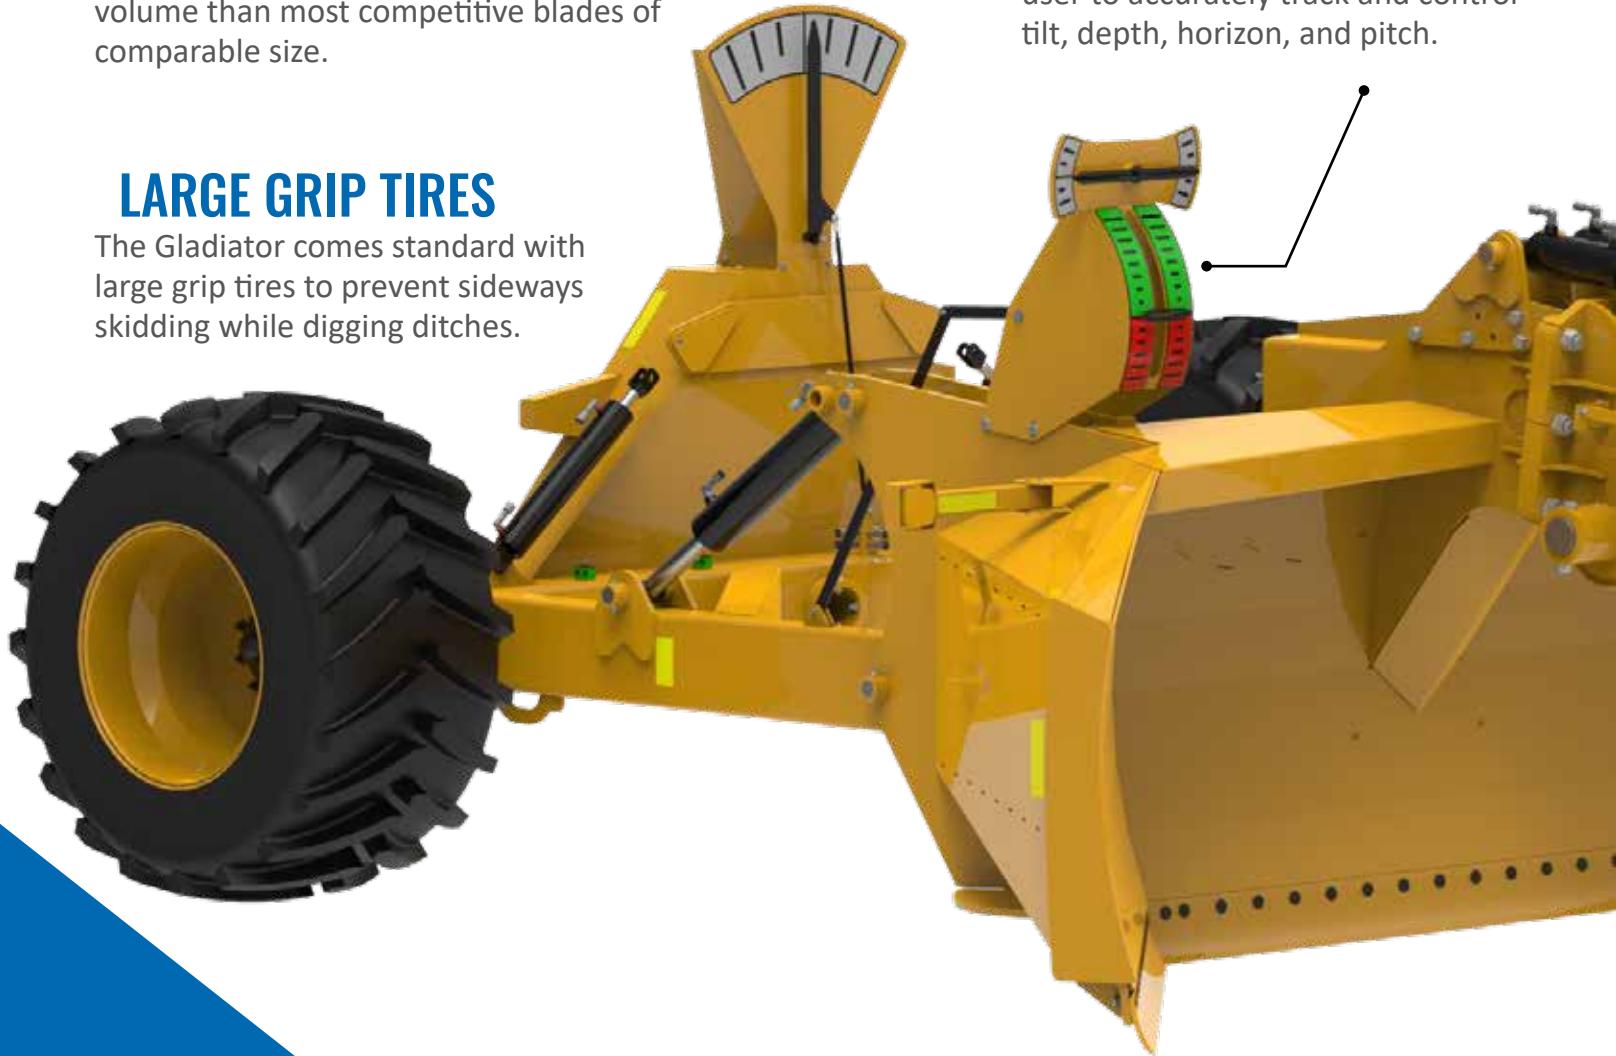

HEAVIEST IN ITS CLASS

**STRONGEST FRAME DESIGN
LARGE GRIP TIRES
EXTRA-HIGH VOLUME DIRT CAPACITY**

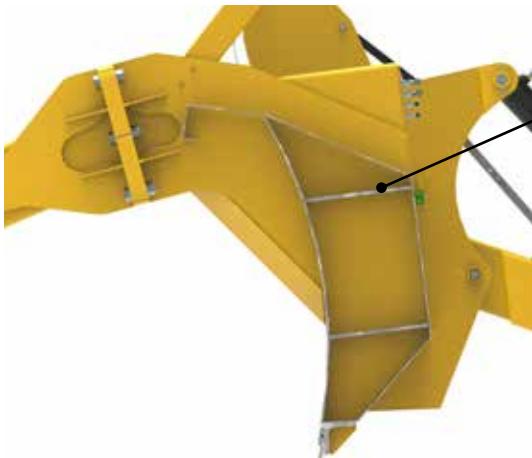

The Gladiator's robust frame design is up to 75% stronger than competitive units.


Blade relief allows dirt to roll, reducing HP requirements.

A uniquely angled cutting edge reduces power hop.



TILT

The Gladiator can tilt one corner down 24" to allow for contouring and digging ditches.

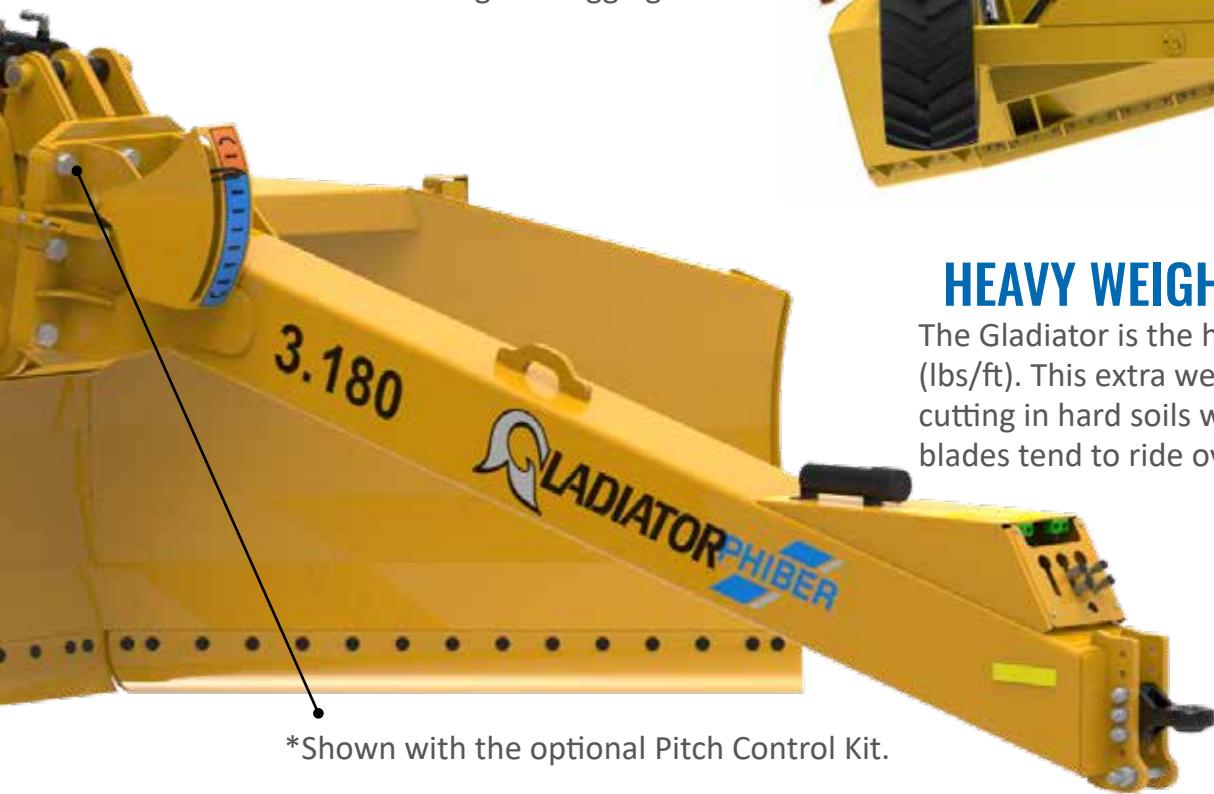


*Shown with the optional Pitch Control Kit.

HEAVY WEIGHT


The Gladiator is the heaviest blade in its class (lbs/ft). This extra weight ensures effective cutting in hard soils where competitors' blades tend to ride over the top.

TAKE AUTHORITY OVER LAND LOSS BY COMMANDING MORE CONTROL DURING RECLAMATION.

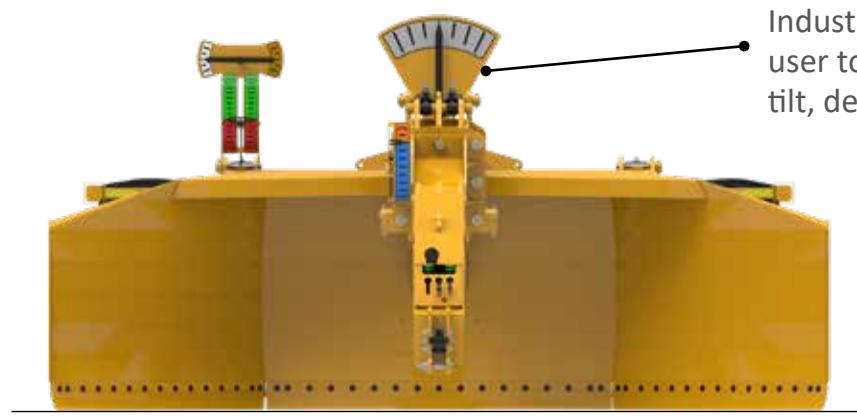


LARGE INDICATORS

Industry-leading indicators allow the user to accurately track and control tilt, depth, horizon, and pitch.

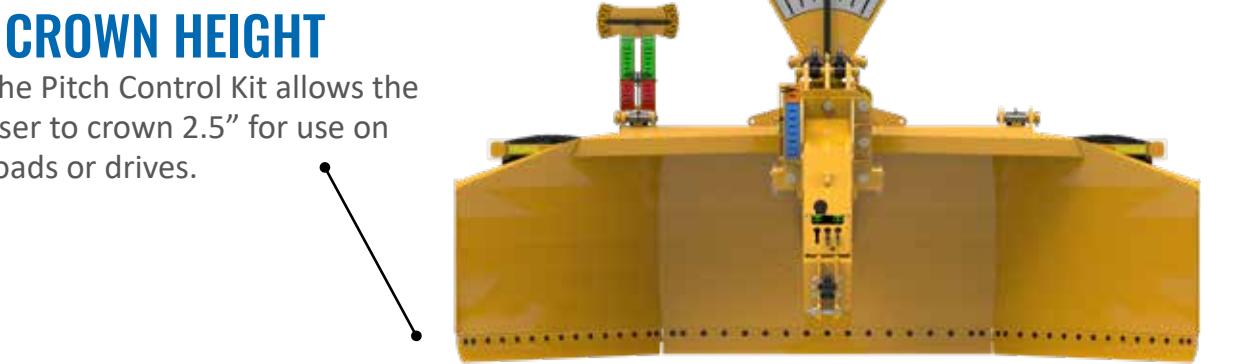


CROWN HEIGHT

The Pitch Control Kit allows the user to crown 2.5" for use on roads or drives.

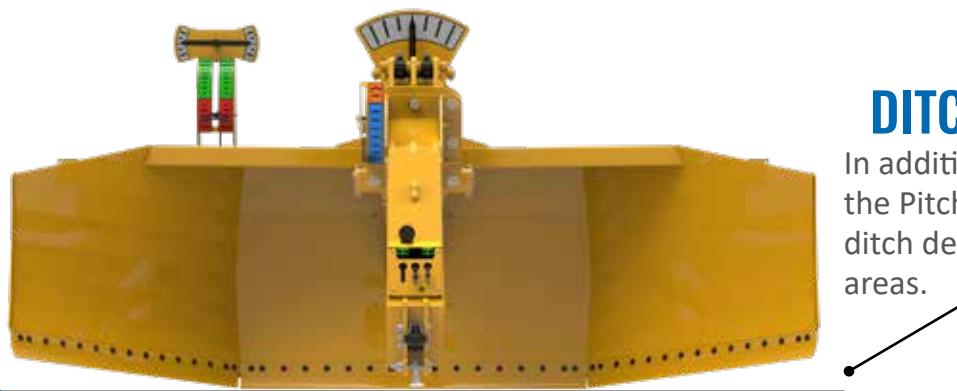

DITCH DEPTH

In addition to the crowning allowance, the Pitch Control Kit allows a 10.25" ditch depth for drainage in designated areas.

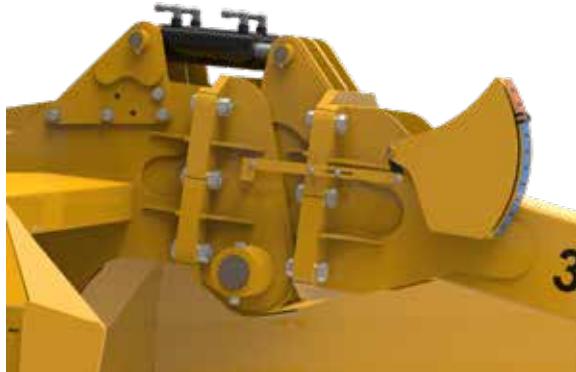


OPTIONAL PITCH

The optional pitch-control assembly can be added to any Series-3 Gladiator.

DUAL CYLINDERS

Dual cylinders power the crown and ditch capabilities of the Pitch Control Kit.

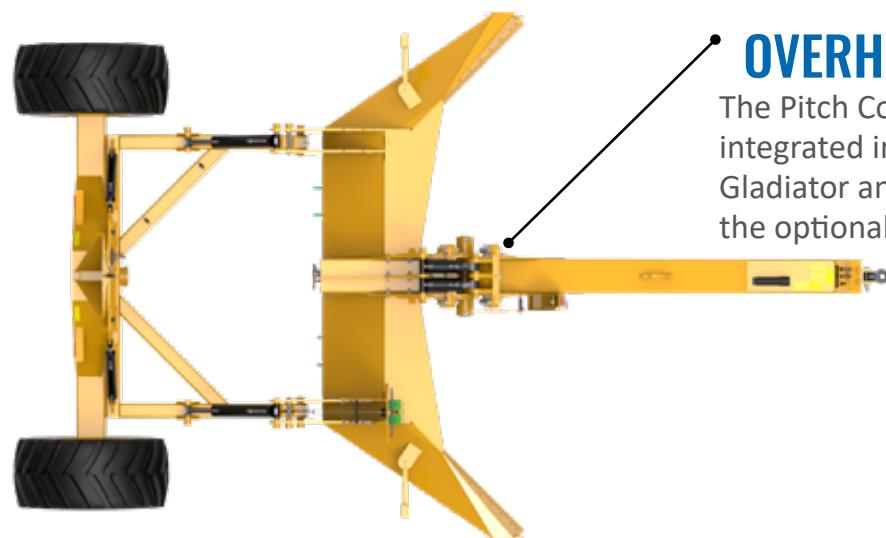

OVERHEAD

The Pitch Control Kit is seamlessly integrated into the neck of the Gladiator and is fully compatible with the optional GPS mount.

AVAILABLE IN 18 FT OR 22 FT MODELS, THE GLADIATOR IS SURE TO MAXIMIZE PROFITABILITY THROUGHOUT EVERY ACRE!

CATEGORY-4 OR 5 HITCH

Each blade comes standard with a 2" category-4 hitch. A $2\frac{1}{16}$ " category-5 hitch is available as an option.



PITCH CONTROL

Increase the Gladiator's versatility with the optional Pitch Control Kit.



GPS MOUNT

Attach a GPS receiver for precise tracking of blade location.




LASER POLES

Increase the Centurion's precision with the optional Laser Poles.



SERRATED CUTTING EDGE

An optional serrated cutting edge can be added for use in heavy clay or hard-soil conditions.

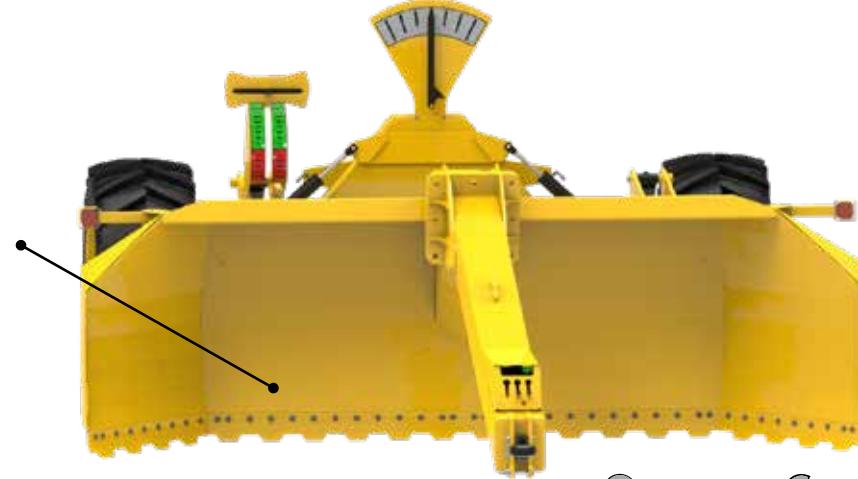




PhiBer.ca | 1.866.264.8030





DESIGN

The Centurion is designed to execute land-leveling projects with industry-leading precision.

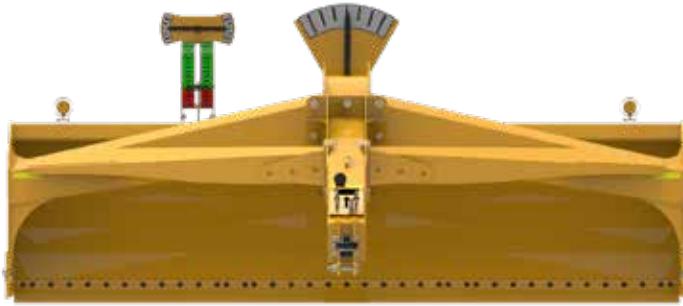

BOX DEPTH


The Centurion's deep box design increases carrying capacity.

LASER POLES

The Centurion can be equipped with optional poles to mount laser equipment, ensuring further precision throughout land-leveling projects.

LARGE INDICATORS

Industry-leading indicators allow the user to accurately track and control tilt, depth, and horizon.

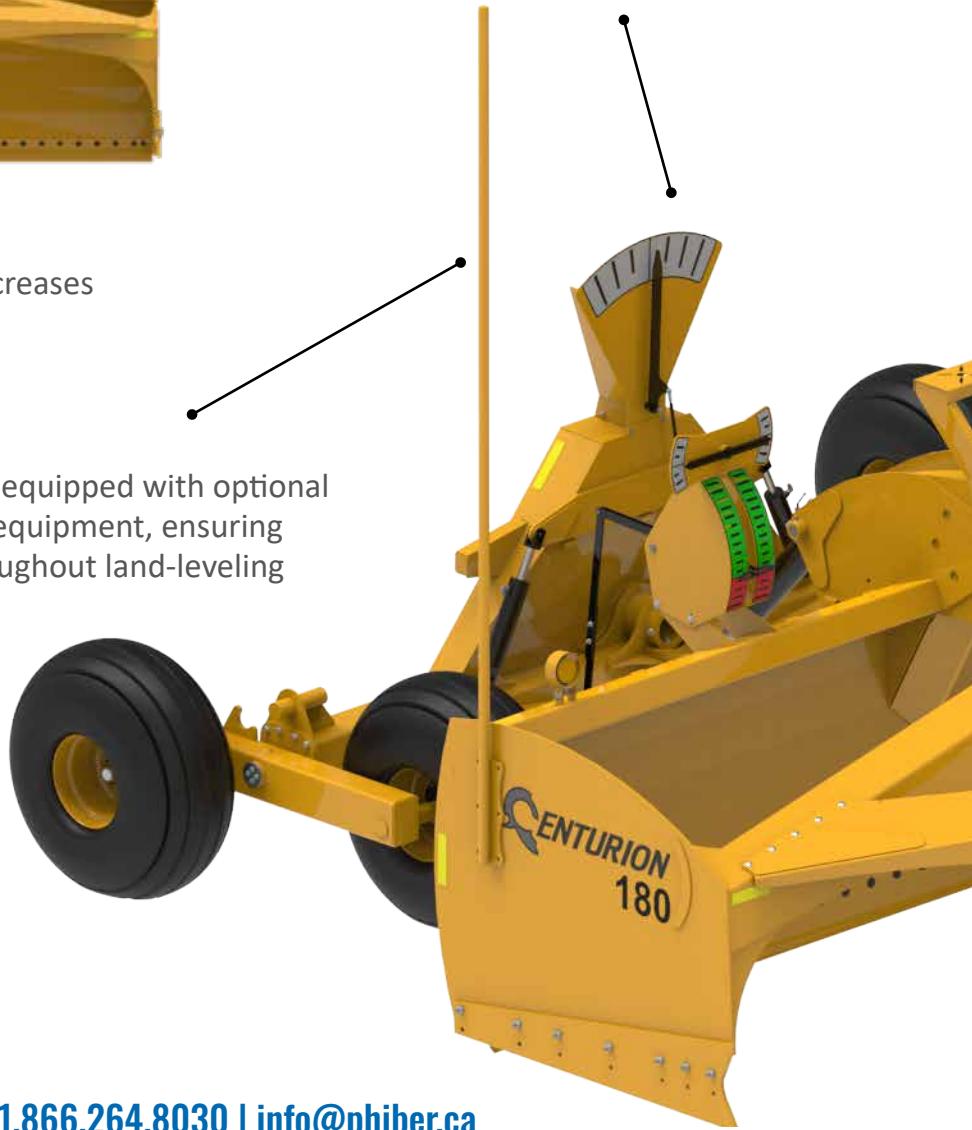

CONTAINMENT GUIDE

A high-wear, reversible, and replaceable containment guide ensures longevity and durability of the Centurion.

PRECISION FOR GENERATIONS TO COME...

PHIBER'S EARTH-MOVING IMPLEMENTS ARE DESIGNED WITH THE FUTURE IN MIND.


TI^LT

The Centurion allows the user 16" of tilt in both directions.



WALKING AXLES

The Centurion boasts walking axles, as well as a simple single-lift cylinder to aid in precision across a variety of landscapes.

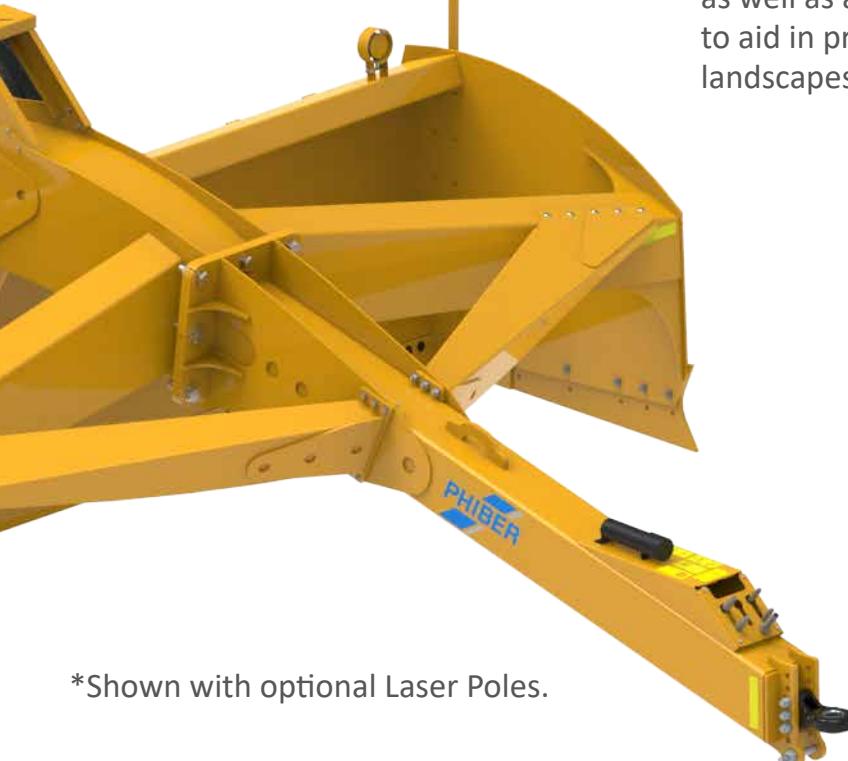

*Shown with optional Laser Poles.

Specifications

Measurement	Model	Gladiator 3.180	Gladiator 3.220	Centurion 180
Width	ft [cm]	18 (549)	22 (671)	18 (549)
Length	ft [cm]	29 (876)	29 (876)	27 (825)
Height	ft [cm]	10 (305)	10 (305)	8 (247)
Weight	lb [kg]	21,000 (9,525)	23,000 (10,433)	12,200 (5,545)

Specifications	Model	Gladiator 3.180	Gladiator 3.220	Centurion 180
Tilt (from center)	in [cm]	24 (61)	24 (61)	16 (41)
Dirt Volume	cu/yds	16-20	21-26	14.7
Hydraulic Remotes*		2 (3*)	2 (3*)	2
Rear Tail Lights and Flashers		Standard	Standard	Standard
GPS Mount		Optional	Optional	Optional
Cutting Edge		Standard	Standard	Standard
Serrated Cutting Edge		Optional	Optional	N/A
Pitch Control*	HYD remote	Optional	Optional	N/A
Walking Axles		N/A	N/A	Standard
Tire Size		30.5L-32, 16-ply, R1	30.5L-32, 16-ply, R1	21.5L-16.1, I1

Requirements			
Horsepower	350+	450+	250+
Tractor Hydraulics	2,900 psi	2,900 psi	2,900 psi

* Third hydraulic remote required for the Pitch Control Kit.



 **CENTURION**



 **GLADIATOR**



PhiBer.ca | 1.866.264.8030





CANADA:
108 New Hope Dr., Box 58
Crystal City, MB R0K 0N0



USA:
213 Main Street, Box 54
Sarles, ND 58372



AUSTRALIA:
17 Wild Avenue, Moama
NSW 2731

Toll-Free: 866.264.8030 | **International:** 204.873.2448 | www.PhiBer.ca

Covered by U.S. Patent No. 12,338,603. Additional patents pending.

Specifications and product details are subject to change without notice. Images shown are for reference only.
Printed in Canada. Release date: August 2025