



INNOVATIVE DESIGN • PARTNERS IN EFFICIENCY



GLADIATOR

LARGE GRIP TIRES

The Gladiator has large grip tires to hold the blade from skidding sideways when digging ditches with one corner of the blade.



Shown with optional
MOLDBOARD EXTENSION KIT


TILT

The Gladiator can be tilted to dig 24" with one corner allowing for great contours.



DESIGN

The unique blade design creates added strength and longevity. The Gladiator boasts the deepest box section in the industry protecting your investment.

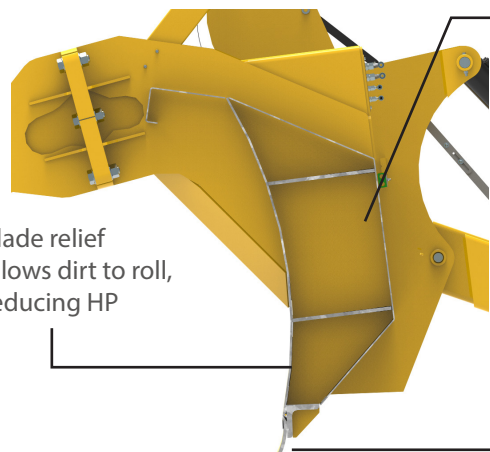

Robust frame design, up to 75% stronger than competitive units

Blade relief allows dirt to roll, reducing HP

Unique angle of cutting edge reduces power hop

DEPTH INDICATOR



Know your cutting or filling depth.

Shown with optional
GPS MOUNT

- **Heaviest** in class
- **Extra High** volume dirt capacity
- **Large** grip tires
- **Strongest** frame design

CAPACITY

The Gladiator series of blades can move more dirt than competitive units due to its unique blade shape. It can move 10% more dirt than most competitive blades the same width.

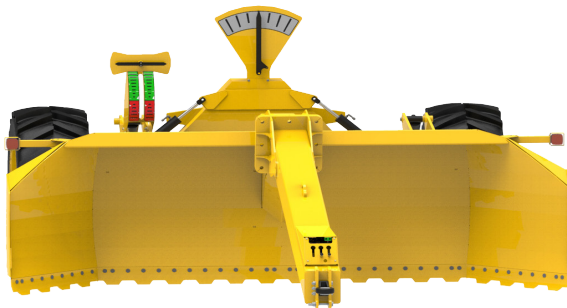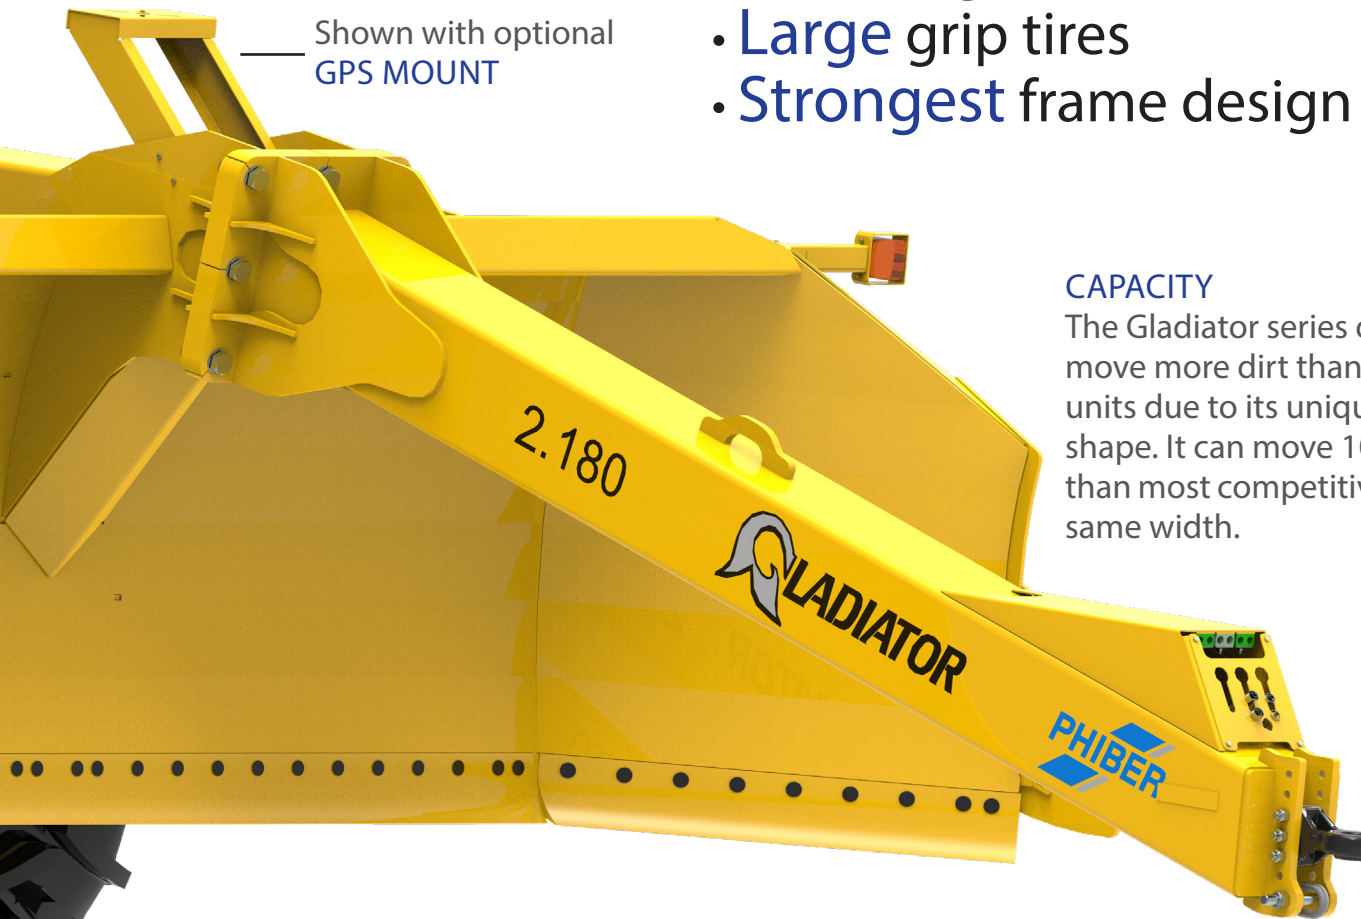

SERRATED CUTTING EDGE:

Option available for cutting into clay like conditions.

LARGE INDICATORS

Each machine comes with easy to see tilt, horizon and depth indicators.

HEAVY WEIGHT

The Gladiator is one of the heaviest lbs/ft in the industry. This ensures cutting in hard soils when others skid over the top.



Specifications



| Models | | Gladiator 2.18 | Gladiator 2.22 |
|--------|---------|-------------------|-------------------|
| Size | | | |
| Width | ft (cm) | 18 (549) | 22 (671) |
| Length | ft (cm) | 28.75 (876) | 28.75 (876) |
| Height | ft (cm) | 10 (305) | 10 (305) |
| Weight | lb (kg) | 21,000 (9,525) | 23,000 (10,433) |

Specifications

| | | | |
|-------------------------------|---------|--------------------------|---------------|
| Hydraulic Remotes | | 2 | 2 |
| Roll Depth on End of Blade | in (cm) | 24 (61) | 24 (61) |
| Rear Tail Lights & Flashers | | ● | ● |
| Moldboard Ext. Kit | | ○ | ○ |
| GPS Mount | | ○ | ○ |
| Serrated Cutting Edge | | ○ | not available |
| Volume of Dirt | cu/yds | 16-20 | 21-26 |
| Tire Size | | R1 Lug 30.5L - 32/16 ply | |

● Standard ○ Optional

Requirements

| | | |
|-------------------------|------------|------------|
| Horsepower Requirements | 250-450 hp | 350-600 hp |
| Tractor Hydraulics | 2,900 psi | 2,900 psi |



Canada:

108 New Hope Dr., Box 58
Crystal City, MB R0K 0N0

USA:

68 Main Street, Box 54
Sarles, ND 58372

Toll Free: 866.264.8030 |
International: 204.873.2448
www.phiber.ca



This literature has been compiled for worldwide circulation. PhiBer reserves the right to change specifications, design and price of products described in this literature without notice. Please inquire to our sales network for any further information. Printed in Canada. Issued 6/2018



INNOVATIVE DESIGN • PARTNERS IN EFFICIENCY