

Brilliantly Fast

The design of the DASH has two primary objectives:

- 1. Keep the sprayer spraying by reducing fill times
- 2. Keep chemicals safely separated during sprayer loading




All inductors come with flip-up lids, and can be fitted with an optional jug knife.




Every inductor automatically rinses itself with every unload.

The Unique linkage shuts the rinse off before the main valve it closes, allowing for complete cleanout of each inductor.





The Air-Powered Diaphragm Pump is the heart of the rinse and agitate system. This pump is used for rinsing jugs, inductors and getting dry chemicals into suspension. It also controls the hand sprayer, & wash down for a complete and easy cleanout.

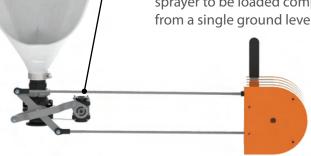



DASH Concept



Inductor rinse system automatically turns on whe chemical is being unloade washing and draining the inductor.

Choose a source for the rinse pump from either

Inductor rinse system automatically turns on when chemical is being unloaded, washing and draining the inductor .

All inductors have anti-vortex plates which increase unloading speeds. It also reduces the amount of air being drawn into the water stream, minimizing foaming.


Each DASH comes standard with a water agitate in one inductor. An optional dry mix agitator (blender) is available to get heavier dry products into suspension.




To rinse jugs, • push to activate.

DASH 2.2 has all the same features as its big brother, just in a smaller package.

Preload, Auto Rinse, Agitate Dry Products and Easy Cleanout are at the core of its design.

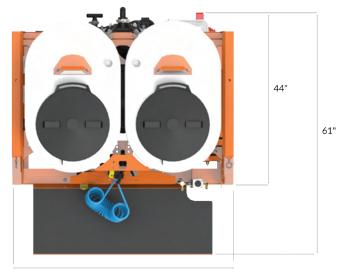

55"

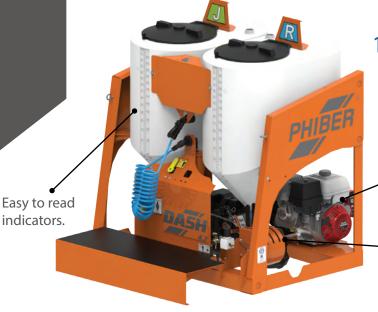

150 Gallons (570 ltr) of Storage:

75 gal (285 ltr) Inductor x2

Shown with an optional 13HP Honda with Hypro pump.

Handles allow for the operator to stand in one spot and unload inductors or meter from bulk containers.









Designed to mount on the back of a tanker, flat deck trailer or grain box,

the DASH 4.0 Rear Mount has all the same features of the center mount DASH but with a different frame to support a different mounting. This model includes tail/turn lights, flip down work platform and a license plate holder.



Rear mount includes tail lights and flip down deck.




DASH 4.2 is designed to maximize efficiency, increase chemical efficacy

Four 75 gal (285 ltr) inductors for 300 gal (1,140 ltr) of total chemical storage give lots of capacity for large mixes.


Easy to read indicators.




Comes standard with a 13HP Honda, electric start motor and 3" Hypro pump.

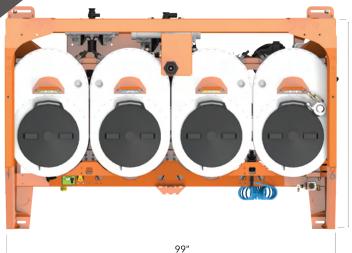

62"



Easy to pull handles allow the operator to stand in one spot and unload inductors.

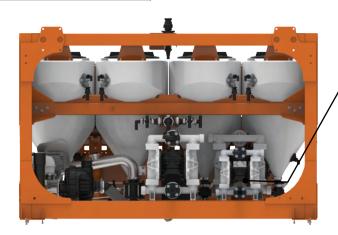

Up to two optional chemical transfer pumps are available.





4.2

Option available on DASH 4.2

2.2

Option available on DASH 2.2







TANKS **4.2 2.2**

Includes hoops for mounting & internal baffles.

mema bannesi				
Capacity (Gal)	(W"x L"x H")			
3250	88 x 146 x 79			
3750	88 x 146 x 91			
4250	88 x 146 x 101			



WORKING PLATFORM

4.2





JUG KNIFE KIT 4.2 2.2



DRY AGITATOR KIT 4.2 2.2





REAR OR SIDE REFILL



CAGE WITH TOTE PLATFORM 4.2 2.2



MANIFOLD 4.2 2.2










CHEMICAL TRANSFER PUMP 4.2 2.2

Choose from a 20 GPM or 40 GPM pump



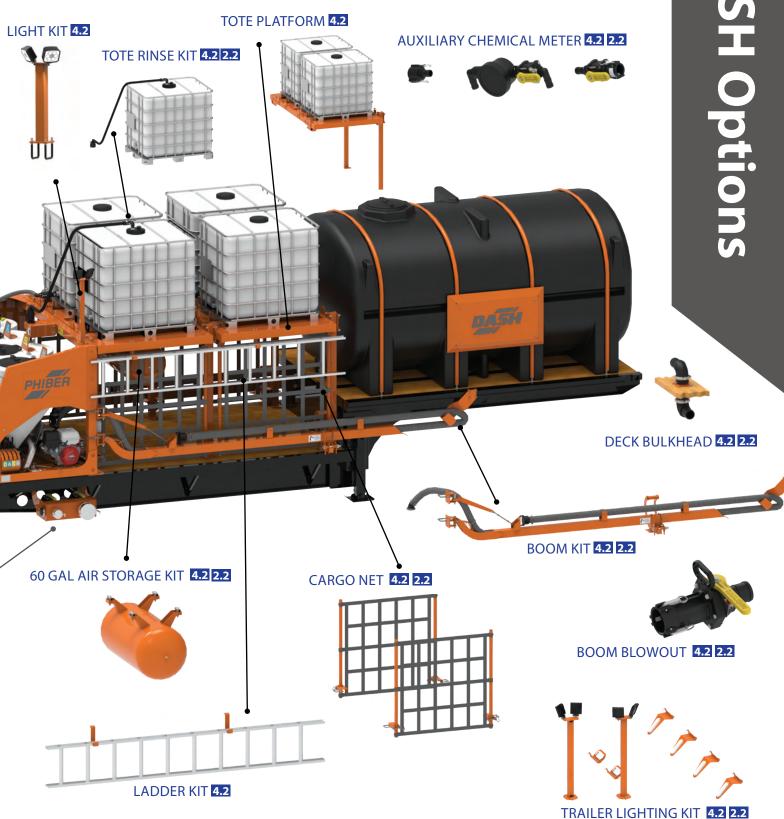



Pintle Trailer

- Air Ride Suspension & Braking
- 3,250 gal Water Capacity
- 4 Tote Capacity
- Two DASH Options
- DASH 2.2 or 4.2 Available



28' Gooseneck

Spring Ride Suspension

3,250 gal Water Capacity

4 Tote Capacity

DASH 2.2 or 4.2 Available



45 ft Tandem

- Air Ride Suspension
- 6,500 gal Water Capacity
- 8 Tote or Pallet Carrying Capacity







Sprayer Trailer

- Air Ride Suspension
- Multiple Water Capacity Options Up To 3,750 gal



45ft. Tri-Axle

- Air Ride Suspension
- Multiple Water Capacity Options Up To 8,000 gal
- 8 Tote or Pallet Carrying Capacity



50ft. Tri-Axle

- Air Ride Suspension
- Multiple Water Capacity Options Up To 8,000 gal
- 12 Tote or Pallet Carrying Capacity
- DASH 4.2 Standard







Dash 2.2 Dash 4.0 Rear Dash 4.2 Center

Size				
Width	in (cm)	56 (141)	102 (259)	99 (251)
Length	in (cm)	61 (154)	36 (91)	62 (158)
Height	in (cm)	55 (138)	78 (198)	62 (158)
Weight	lbs (kg)	600 (272)*	1550 (704)	1230 (560)
Dash Specif	fications			
13 hp Honda w	ı/ Hypro Pump	0	•	•
6.5 hp Honda v	w/ Pacer Pump	0		
75 gal (284 ltr)	Inductor (Qty)	X 2	X 4	X 4
Air Diaphragm	Rinse Pump	20 GPM	40 GPM	40 GPM
Manual Hand S	prayer			
Rear Tail Lights	5			
Flip Down Re	ear Work Platform			
Doguiromo	ntc			

Requirements

3" Water Supply Line 1" Water Supply Line 3/8" Air Supply 3" Water Supply Line 1 1/2" Water Supply Line 3/8" Air Supply

305"
65"
62"
60"
61"
62"
62"
62"
62"

CANADA

108 New Hope Dr., Box 58 Crystal City, MB R0K 0N0

USA:

68 Main Steet, Box 54 Sarles, ND 58372 Toll Free: 866.264.8030 International: 204.873.2448 www.phiber.ca



^{*} with no pump